



Test Report: LOP-600-48

600W 5"×3" Low Profile Open Frame Power Supply

■ DESIGN VERIFY TEST

Output Function Test

Input Function Test

Protection Function Test

Control Function Test

Component Stress Test

■ SAFETY & E.M.C. TEST

Safety Test

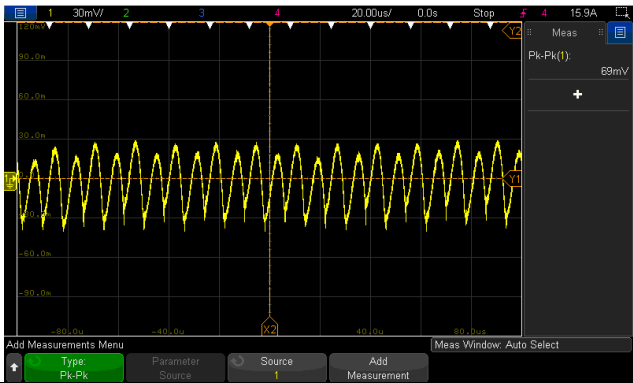
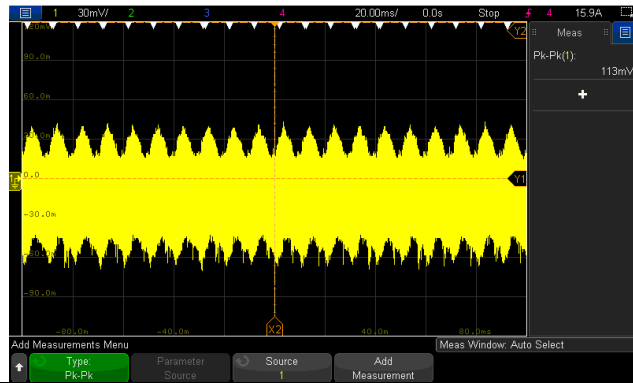
E.M.C. Test

■ RELIABILITY TEST

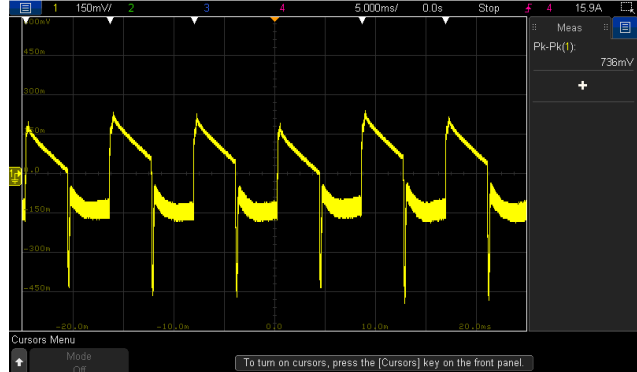
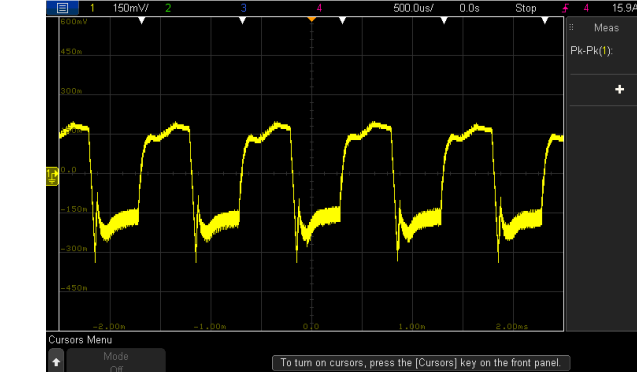
ENVIRONMENT TEST

DESIGN VERIFY TEST


OUTPUT FUNCTION TEST

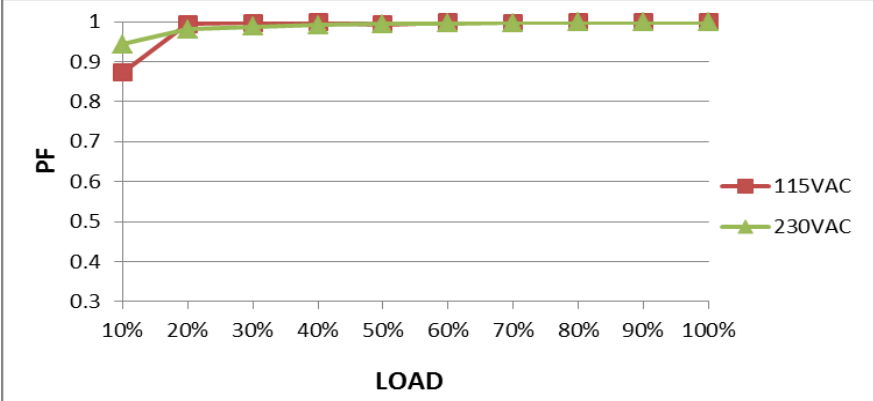
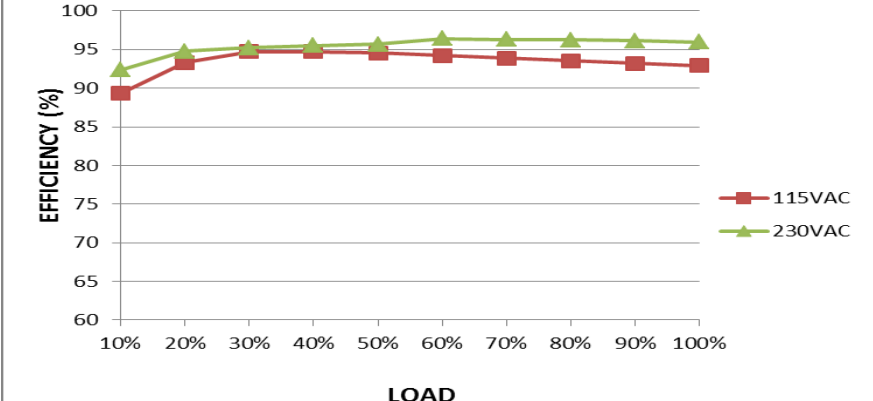
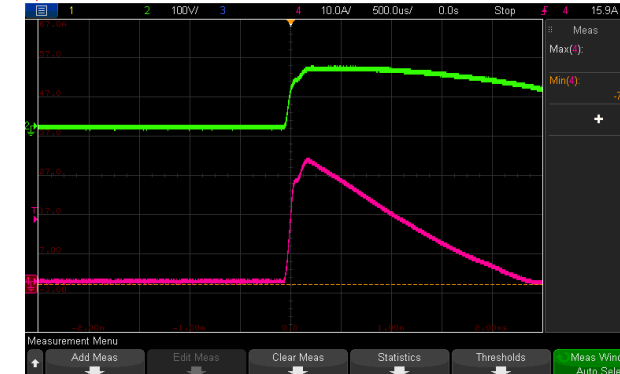
NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	OUTPUT VOLTAGE ADJUST RANGE	CH1: 45.6~50.4V	I/P : 230 VAC I/P : 115 VAC O/P : MIN LOAD Ta : 25°C	44.132V~52.17V/230VAC 44.132V~52.17V/115VAC
2	OUTPUT VOLTAGE TOLERANCE	V1: -1% ~ +1%	I/P: 80VAC~ 264VAC O/P:FULL~ MIN. LOAD Ta:25°C	V1: -0.02% ~0.09%
3	LINE REGULATION	V1: -0.5% ~ +0.5%	I/P: 80VAC~ 264VAC O/P:FULL LOAD Ta:25°C	V1: 0% ~0 %
4	LOAD REGULATION	V1: -1% ~ +1%	I/P: 230VAC O/P:FULL ~MIN LOAD Ta:25°C	V1: -0.02% ~0.09%
5	OVER/UNDERSHOOT TEST	<±5%	I/P: 230VAC O/P:FULL LOAD / NO LOAD Ta:25°C	0.84%
6	RIPPLE & NOISE (Max)	V1: 250mVp-p	I/P:230VAC O/P: FULL LOAD O/P:PEAK LOAD Ta:25°C	V1: 69mVp-p / high frequency 113mVp-p / low frequency
high frequency :  low frequency : 				
7	SET UP TIME(Max)	230VAC/1000ms 115VAC/1500ms	I/P : 230 VAC I/P : 115 VAC O/P : FULL LOAD Ta : 25°C	230VAC/ 806ms 115VAC/ 624ms
INPUT=230VAC/50HZ @ FULL LOAD CH1: Output Voltage CH2: AC Input Voltage			INPUT=115VAC/60HZ @ FULL LOAD CH1: Output Voltage CH2: AC Input Voltage	

8	RISE TIME (Max)	230VAC/30ms 115VAC/30ms	I/P : 230 VAC I/P : 115 VAC O/P : FULL LOAD Ta : 25°C	230VAC/7.13 ms 115VAC/ 7.14ms
INPUT=230VAC/50HZ @ FULL LOAD CH1: Output Voltage				
		INPUT=115VAC/60HZ @ FULL LOAD CH1: Output Voltage		
9	HOLD UP TIME (Typ.)	8ms /600W load 12ms /400W load	I/P : 230 VAC O/P : TESTING Ta : 25°C	17.2ms /600W load 26.6ms /400W load
INPUT=230VAC/50HZ @ 600W load CH1: Output Voltage CH2: AC Input Voltage				
		INPUT=230VAC/50HZ @ 400W load CH1: Output Voltage CH2: AC Input Voltage		
10	DYNAMIC LOAD	V1: 4800mVp-p	I/P: 230VAC O/P: (1) FULL/0% LOAD 50%DUTY / 120HZ (2) FULL/0% LOAD 50%DUTY / 1KHZ Ta:25°C	736mVp-p 537mVp-p
FULL /0% LOAD 50%DUTY / 120HZ				
FULL /0% LOAD 50%DUTY / 1KHZ				

				
11	TRANSIENT RECOVERY TIME	V1: 4800mVp-p < 500us	I/P: 230VAC O/P:40% LOAD CHANGE 50%DUTY/120HZ 1.25A/us	373mVp-p 0us
12	PEAK LOAD	150% PEAK LOAD@3S	I/P: 264VAC I/P: 115VAC O/P: PEAK LOAD	TEST : OK

INPUT FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	INPUT VOLTAGE RANGE	80VAC~264VAC 113VDC~ 370VDC Output Derating VS Input Voltage 	(1) I/P: TESTING O/P: FULL / 70% LOAD (2) I/P: DC TESTING (L: + N: -) O/P: FULL / 70% LOAD (3) I/P: DC TESTING (L: - N: +) O/P: FULL / 70% LOAD Ta:25°C I/P: HIGH-LINE+15%=300V O/P:FULL/MIN LOAD (PLEASE CHECK DERATING CURVE) ON: 30 Sec OFF: 30 Sec 10MIN (POWER ON/OFF NO DAMAGE)	(1) 75V~264V/ FULL LOAD 75V~264V/ 70% LOAD (2) 95.26Vdc~370Vdc/FULL LOAD 96.42Vdc~370Vdc/70% LOAD (3) 95.26Vdc~370Vdc/FULL LOAD 96.42Vdc~370Vdc/70% LOAD TEST : OK
2	INPUT FREQUENCY RANGE	47HZ ~63 HZ NO DAMAGE	I/P:80 VAC ~264 VAC O/P:FULL~MIN LOAD Ta:25°C	TEST : OK
3	INPUT CURRENT (Typ.)	230V/ 3.2A 115V/ 6.4A	I/P : 230 VAC I/P : 115 VAC O/P : FULL LOAD Ta : 25°C	I =2.76A/ 230VAC I =5.74A/ 115VAC
4	LEAKAGE CURRENT	Earth leakage current <500uA(rms) @ 264VAC touch current <70uA(rms) @ 264VAC	I/P : 264 VAC/60HZ O/P : Min LOAD Ta : 25°C	257.3 uA / 264 VAC@ For Earth 34.1uA / 264 VAC@For Touch
5	NO LOAD CONSUMPTION	<0.5W	I/P : 240VAC O/P : NO LOAD Ta : 25°C	0.3725W

6	POWER FACTOR (Typ.)	0.94/ 230VAC 0.98/115VAC	I/P : 230 VAC I/P : 115 VAC O/P : FULL LOAD Ta : 25°C	PF=0.9935/230VAC PF=0.9975/115VAC
	P.F vs LOAD 			
7	EFFICIENCY(Typ.)	95%	I/P:230 VAC O/P:FULL LOAD Ta:25°C	95.34%
	EFFICIENCY vs LOAD 			
8	INRUSH CURRENT(Typ.)	230V/80A 115V/40A COLD START	I/P : 230 VAC I/P : 115 VAC O/P : FULL LOAD Ta : 25°C	I =66.1A/ 230VAC I =31.4A/ 115VAC T50=1080us/230V
	INPUT=230VAC/50HZ @ FULL LOAD CH2: AC Input Voltage CH4: Input current 			
	INPUT=115VAC/ 60HZ @ FULL LOAD CH2: AC Input Voltage CH4: Input current 			

PROTECTION FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	OVER LOAD PROTECTION	105%~ 150% PROTECTION TYPE : Hiccup after 3 sec, recovers automatically after fault condition is removed	I/P: 264VAC I/P: 230VAC I/P: 115VAC O/P: TESTING Ta:25°C	138.4%/ 264VAC 138.4%/ 230VAC 137.6%/ 115VAC PROTECTION TYPE : Hiccup after 3 sec, recovers automatically after fault condition is removed
2	OVER VOLTAGE PROTECTION	52.8V~62.4V Protection type: Shut down o/p voltage, re-power on to recover	I/P: 264VAC I/P: 80VAC O/P: MIN LOAD Ta:25°C	56.3V/ 264VAC 56.3V/ 80VAC Protection type: Shut down o/p voltage, re-power on to recover
3	OVER TEMPERATURE PROTECTION	Protection type: Shut down o/p voltage, recovers automatically after temperature goes down (Vin=115Vac); Shut down o/p voltage, re-power on to recover (Vin=230Vac or FAN LOCK)	I/P: 264VAC I/P: 80VAC O/P: FULL LOAD	O.T.P. Active OK Protection type : Shut down o/p voltage, recovers automatically after temperature goes down (Vin=115Vac); Shut down o/p voltage, re-power on to recover (Vin=230Vac or FAN LOCK)
4	SHORT PROTECTION	SHORT EVERY OUTPUT 1 HOUR NO DAMAGE Protection type: Hiccup mode, recovers automatically after fault condition is removed	I/P: 264VAC I/P: 80VAC O/P: FULL LOAD Ta:25°C	NO DAMAGE PROTECTION TYPE : OK Hiccup mode, recovers automatically after fault condition is removed

CONTROL FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	EXTERNAL FAN SUPPLY	12V@0.5A for driving a fan ; tolerance -15% ~ +15% at main output 20% rated current (23CFM)	I/P: 230 VAC O/P: TESTING Ta:25°C	TEST : <u>-0.25 % ~ 0.17 %</u>
2	REMOTE SENSE	S+ / S- The remote sensing compensates voltage drop on the load wiring up to 0.5V	I/P: 230 VAC O/P: FULL LOAD Ta:25°C	TEST : <u>OK</u>

COMPONENT STRESS TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	PWM Transistor (D to S) or (C to E) Peak Voltage	Q2/ Q3 Rated: 26A/ 600V	AC ON/OFF I/P: High-Line +3V =267V VDS: O/P: (1)Full Load (2)Output Short (3) Dynamic Load Full Load/ Min. Load 90%Duty/1KHz (4) Dynamic Load Full Load/	Q2: Q3: VDS: VDS: (1) 429V (1) 429V (2) 433V (2) 425V (3) 429V (3) 421V (4) 425V (4) 421V (5) 429V (5) 413V (6) 433V (6) 417V

			Min. Load 90%Duty/3KHz (5) Dynamic Load Full Load/ Min. Load 90%Duty/5KHz (6) Dynamic Load 100% Load/ Min. Load 50%Duty/120Hz (7)0%→400% Load (8) Peak Load Ta:25°C	(7) 441V (8) 429V	(7) 425V (8) 421V
2	P.F.C Transistor (D to S) or (C to E) Peak Voltage	Q1 Rated: 52A/600V	AC ON/OFF I/P: High-Line +3V =267V VDS: O/P: (1)Full Load (2)Output Short (3) Dynamic Load Full Load/ Min. Load 90%Duty/1KHz (4) Dynamic Load Full Load/ Min. Load 90%Duty/3KHz (5) Dynamic Load Full Load/ Min. Load 90%Duty/5KHz (6) Dynamic Load 100% Load/ Min. Load 50%Duty/120Hz (7)0%→400% Load (8) Peak Load Ta:25°C	VDS: (1) 437V (2) 425V (3) 433V (4) 429V (5) 429V (6) 449V (7) 453V (8) 449V	
3	P.F.C DIODE	D2 Rated: 6A/ 650V	I/P: High-Line +3V =267 V AC ON/OFF O/P: (1)Full Load (2)Output Short (3) Dynamic Load Full Load/ Min. Load 90%Duty/5KHz (4) Dynamic Load 100% Load/ Min. Load 50%Duty/120Hz (5) Peak Load Ta:25°C	(1) 408V (2) 396V (3) 416V (4) 416V (5) 416V	
4	Diode Peak Voltage	Q101/Q103 Rated: 100A/ 150V	AC ON/OFF I/P: High-Line +3V =267 V Vo=Vmax O/P: (1)Full Load (2)Output Short (3) Dynamic Load Full Load/ Min. Load 90%Duty/1KHz (4) Dynamic Load Full Load/ Min. Load 90%Duty/3KHz (5) Dynamic Load Full Load/ Min. Load 90%Duty/5KHz (6) Dynamic Load 100% Load/ Min. Load 50%Duty/120Hz (7)0%→400% Load. (8).NO LOAD	Q101: Vo=Vmax VDS: (1) 122.1V (2) 124.4V (3) 122.1V (4) 125.0V (5) 124.0V (6) 124.5V (7) 119.7V (8) 117.6V (9) 121.5V (10) 125.0V Vo=Vnormal (1) 119.2V	Q103: Vo=Vmax VDS: (1) 124.5V (2) 123.7V (3) 123.7V (4) 124.7V (5) 123.7V (6) 124.5V (7) 118.1V (8) 118.6V (9) 129.2V (10) 126.9V Vo=Vnormal (1) 119.9V

			(9) burst Mode (10) Peak Load <u>Vo=Vnormal</u> O/P: (1) Full Load Ta:25°C	
5	Input Capacitor Voltage	C5 Rated: 330μ / 400V	I/P: High-Line +3V =267V O/P: (1)Full Load input on/off (2) Min load input on /Off (3) Full Load /Min load Change (4) Full load continue Ta:25°C	(1) 393V (2)385 V (3)395 V (4)393 V
6	Control IC Voltage Test	PFC /PWM IC U1: Rated : 10.4V~28.7 V O/P IC U101 Rated : 4.75V~38V	AC ON/OFF I/P: High-Line +3V =267 V O/P: (1) FULL LOAD (2) Output Short (3) O.L.P (4) O.V.P. (5) NO LOAD VRmin (LOW LINE) Ta:25°C	U1 U101 (1) 18.9V (1) 10.85V (2) 18.9V (2) 10.69V (3) 18.9V (3) 10.69V (4) 18.9V (4) 11.33V (5) 18.9V (5) 8.60V

■ SAFETY& E.M.C. TEST

SAFETY TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	WITHSTAND VOLTAGE	I/P-O/P: 4KVAC/min I/P-FG :2KVAC/min O/P-FG:1.5KVAC/min	I/P-O/P: 4.4 KVAC/min I/P-FG: 2.4 KVAC/min O/P-FG:1.8 KVAC/min Ta:25°C	I/P-O/P: 1.679mA I/P-FG: 2.41mA O/P-FG:0.812mA NO DAMAGE
2	ISOLATION RESISTANCE	I/P-O/P:500VDC>100MΩ I/P-FG: 500VDC>100MΩ O/P-FG:500VDC>100MΩ	I/P-O/P: 600 VDC I/P-FG: 600 VDC O/P-FG: 600 VDC Ta:25°C	I/P-O/P:50GΩ I/P-FG:50GΩ O/P-FG:50GΩ NO DAMAGE

E.M.C TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	HARMONIC	BS EN/EN61000-3-2 CLASS A	I/P:230VAC/50HZ O/P:FULL LOAD Ta:25°C	PASS
2	CONDUCTION	BS EN/EN55032(CISPR32) Class I : Class B , Class II: Class A BS EN/EN55014(CISPR32) Class I : Class B	I/P : 230 VAC (50HZ) O/P : FULL/50% LOAD Ta : 25°C	PASS Test by certified Lab

3	RADIATION	BS EN/EN55032(CISPR32) Class I: Class B , Class II: Class A BS EN/EN55014(CISPR32) Class I: Class B	I/P : 230 VAC (50HZ) O/P : FULL LOAD Ta : 25°C	PASS Test by certified Lab
4	E.S.D	BS EN/EN61000-4-2 ■ MEDICAL AIR : 15KV / Contact : 8KV	I/P : 230 VAC/50HZ O/P : FULL LOAD Ta : 25°C	■ CRITERIA A
5	E.F.T	BS EN/EN61000-4-4 ■ INDUSTRY INPUT : 2KV	I/P : 230 VAC/50HZ O/P : FULL LOAD Ta : 25°C	■ CRITERIA A
6	SURGE	IEC61000-4-5 ■ INDUSTRY L-N : 2KV L,N-PE : 4KV	I/P : 230 VAC/50HZ O/P : FULL LOAD Ta : 25°C	■ CRITERIA A
7	Test by certified Lab & Test Report Prepare Any contradictions of the test results, please refer to the latest EMC test report			

■ RELIABILITY TEST

ENVIRONMENT TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT																																																				
1	TEMPERATURE RISE TEST	MODEL : LOP-600-54 1. ROOM AMBIENT BURN-IN : 2 HRS I/P : 230VAC O/P : FULL LOAD Ta= 28.3 °C 2. HIGH AMBIENT BURN-IN : 2 HRS I/P : 230VAC O/P : FULL LOAD Ta= 50.7 °C <table><tr><th>NO</th><th>Position</th><th>ROOM AMBIENT Ta= 28.3 °C</th><th>HIGH AMBIENT Ta= 50.7 °C</th></tr><tr><td>1</td><td>ZNR1</td><td>33.0°C</td><td>56.4°C</td></tr><tr><td>2</td><td>LF1</td><td>33.0°C</td><td>55.6°C</td></tr><tr><td>3</td><td>C2</td><td>32.0°C</td><td>55.2°C</td></tr><tr><td>4</td><td>RTH1</td><td>35.1°C</td><td>58.4°C</td></tr><tr><td>5</td><td>LF2</td><td>36.7°C</td><td>60.0°C</td></tr><tr><td>6</td><td>BD1</td><td>49.3°C</td><td>72.6°C</td></tr><tr><td>7</td><td>L1</td><td>51.3°C</td><td>74.0°C</td></tr><tr><td>8</td><td>C8</td><td>42.0°C</td><td>65.2°C</td></tr><tr><td>9</td><td>Q1</td><td>51.3°C</td><td>74.5°C</td></tr><tr><td>10</td><td>D2</td><td>51.0°C</td><td>74.2°C</td></tr><tr><td>11</td><td>RY1</td><td>39.0°C</td><td>61.1°C</td></tr><tr><td>12</td><td>RTH3</td><td>47.4°C</td><td>71.1°C</td></tr></table>			NO	Position	ROOM AMBIENT Ta= 28.3 °C	HIGH AMBIENT Ta= 50.7 °C	1	ZNR1	33.0°C	56.4°C	2	LF1	33.0°C	55.6°C	3	C2	32.0°C	55.2°C	4	RTH1	35.1°C	58.4°C	5	LF2	36.7°C	60.0°C	6	BD1	49.3°C	72.6°C	7	L1	51.3°C	74.0°C	8	C8	42.0°C	65.2°C	9	Q1	51.3°C	74.5°C	10	D2	51.0°C	74.2°C	11	RY1	39.0°C	61.1°C	12	RTH3	47.4°C	71.1°C
NO	Position	ROOM AMBIENT Ta= 28.3 °C	HIGH AMBIENT Ta= 50.7 °C																																																					
1	ZNR1	33.0°C	56.4°C																																																					
2	LF1	33.0°C	55.6°C																																																					
3	C2	32.0°C	55.2°C																																																					
4	RTH1	35.1°C	58.4°C																																																					
5	LF2	36.7°C	60.0°C																																																					
6	BD1	49.3°C	72.6°C																																																					
7	L1	51.3°C	74.0°C																																																					
8	C8	42.0°C	65.2°C																																																					
9	Q1	51.3°C	74.5°C																																																					
10	D2	51.0°C	74.2°C																																																					
11	RY1	39.0°C	61.1°C																																																					
12	RTH3	47.4°C	71.1°C																																																					

			NO	Position	ROOM AMBIENT Ta= 28.3 °C	HIGH AMBIENT Ta= 50.7°C
			13	Q3	50.4°C	74.1°C
			14	Q2	49.7°C	73.3°C
			15	C5	44.4°C	66.7°C
			16	T1coil	70.2°C	93.9°C
			17	T1core	41.7°C	65.1°C
			18	TSW1	38.1°C	62.3°C
			19	Q102	46.5°C	71.2°C
			20	Q103	47.7°C	72.7°C
			21	C103	34.8°C	58.8°C
			22	C104	38.7°C	62.4°C
			23	C102	37.4°C	61.2°C
			24	C120	39.6°C	63.1°C
			25	L100	37.0°C	60.7°C
			26	C125	39.9°C	63.7°C
			27	D103	40.5°C	64.6°C
			28	C37	43.2°C	66.6°C
			29	U1	43.0°C	65.9°C
			30	Q8	29.3°C	52.0°C
			31	U103	35.9°C	58.6°C
			32	RG100	41.9°C	65.4°C
			33	U4	35.9°C	59.3°C
			34	R122	39.9°C	62.9°C
			35	D105	37.3°C	59.9°C
			36	R3	41.9°C	65.0°C
			37	D1	35.9°C	58.3°C
			38	Q108	34.7°C	58.1°C
			39	U101	34.5°C	57.4°C
			40	R101	40.2°C	65.3°C
			41	R105	39.4°C	63.6°C
			42	D20	31.8°C	55.7°C
			43	Q7	31.6°C	54.5°C
			44	C60	29.5°C	52.2°C
2	OVER LOAD BURN-IN TEST	NO DAMAGE 1 HOUR (MIN)	I/P : 230 VAC O/P : 129.4%LOAD Ta : 25°C		TEST : OK	
3	LOW TEMPERATURE TURN ON TEST	TURN ON AFTER 2 HOUR	I/P : 264VAC/115VAC O/P : 100%LOAD Ta= -45°C		TEST : OK	
4	HIGH HUMIDITY HIGH TEMPERATURE HIGH VOLTAGE TURN ON TEST	AFTER 12 HOURS IN CHAMBER ON CONTROL 50 °C/95 %R.H NO DAMAGE	I/P : 272 VAC O/P : FULL LOAD Ta= 50 °C HUMIDITY= 95 %R.H		TEST : OK	
5	TEMPERATURE COEFFICIENT	± 0.03%/°C(0~50°C)	I/P : 230 VAC O/P : FULL LOAD		±0.006%/°C(0~50°C)	

6	STORAGE TEMPERATURE TEST	-40~85°C	1. Thermal shock Temperature : -45°C~ +90°C 2. Temperature change rate : 25°C / MIN 3. Dwell time low and high temperature : 30 MIN/EACH 4. Total test cycle : 10 CYCLE 5. Input/output condition : STATIC
7	THERMAL SHOCK TEST	-40~50°C	1. Thermal shock Temperature : -45°C~ +55°C 2. Temperature change rate : 25°C / MIN 3. Dwell time low and high temperature : 30 MIN/EACH 4. Total test cycle : 16 CYCLE 5. Input/output condition : 15cycle:230V/ FULL LOAD AC ON 3sec/AC OFF 1sec TEST 1cycle:230V/ FULL LOAD Burn In Test
8	VIBRATION TEST	10 ~ 500Hz, 2G 10min./1cycle, 60min. each along X, Y, Z axes	1 Carton & 1 Set (1) Waveform : Sine Wave (2) Frequency : 10~500Hz (3) Sweep Time : 12min/sweep cycle (4) Acceleration : 3G (5) Test Time : 180min in each axis (X.Y.Z) (6) Ta : 25°C
9	CAPACITOR LIFE CYCLE	SUPPOSE C102 IS THE MOST CRITICAL COMPONENT (1) I/P : 230VAC O/P : FULL LOAD Ta= 25 °C LIFE TIME (2) I/P : 230VAC O/P : FULL LOAD Ta= 50 °C LIFE TIME (3) I/P : 230VAC O/P : 75% LOAD Ta= 50 °C LIFE TIME (4) I/P : 230VAC O/P : 50% LOAD Ta= 50 °C LIFE TIME	(1) 1550753.7HRS (2) 250515.1HRS (3) 360491.8HRS (4) 452657.3HRS
10	MTBF	Conducted by Parts Stress Analysis Prediction 1963.2K hrs min. Telcordia SR-332 (Bellcore);310.9K hrs min. MIL-HDBK-217F (25°C)	
11	Ongoing Reliability Test	I/P : 230VAC O/P : FULL LOAD TA=50°C Demonstration Mean Time Between Failure : 30,000 hours	

TEST RESULT	TESTER	REVIEW	APPROVAL
PASS	Yuwei	Liutt	Wangdz

2020.10.1 TAG-QA-009